

FLEXI-DRAIN

FLEXIBLE DRAINAGE CONNECTOR



FEATURES

- **Outstanding Flexibility** : Owing to the characteristic of the high quality rubber and bias reinforcement, a moderate length Flexi-Drain provides up to 50mm lateral displacement. This outstanding flexibility allows the Flexi-Drain to be the best choice in drainage and other low pressure system.
- **Underground Application** : Incorporated with steel reinforcing rings enable Flexi-Drain buried underground up to 1.5 M. without deform or failure. Flexi-Drain eliminates additional protection which is required by ordinary rubber joints.
- **Easy Installation** : Flexi-Drain insert type end connection fixed by stainless steel hose clamp reduces installation cost and time. Flexi-Drain can be installed in series to provide greater displacement for critical application.

APPLICATIONS

To be used in most of the drainage, sewerage, or low pressure system to compensate the differential settlement and pipe expansion.


Working Pressure : 1 Kgf/cm² or below

Testing Pressure : 3 Kgf/cm² (Max.)

Working Temperature : -10°C to 60°C

Applicable Fluid : Water, Drainage, and Non-Corrosive Sewerage

STRUCTURE

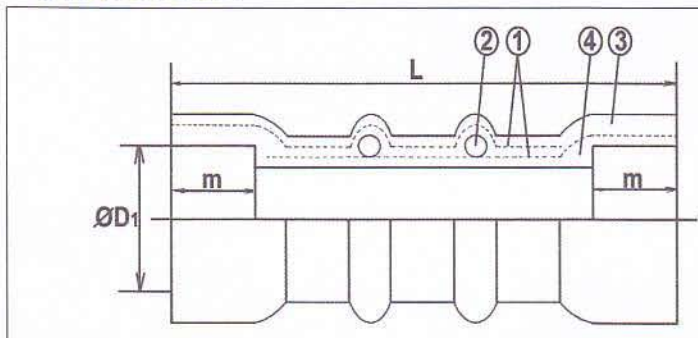

No.	Parts	Materials
①	Reinforcing Cord	Nylon Tire Cord
②	Reinforcing Ring	Mild Steel
③	Outer Rubber	Natural Rubber
④	Inner Rubber	Natural Rubber

DIMENSION AND ALLOWABLE MOVEMENT

Size	D1	L	m	Allowable Displacement (mm)		
				Lateral	Elongation	Contraction
40	48.6	250	50	10	10	
50	60.5	250	50	10	10	
65	76.3	310	80	50	10	
80	89.1	310	80	50	10	
100	114.3	350	100	50	10	
125	139.8	350	100	50	10	
150	165.2	420	120	50	10	
200	216.3	480	150	50	10	
250	270	600	150	50	10	
300	320	600	150	50	10	

บริษัท แอ็ดวานซ์ซินดิเคท จำกัด

ADVANCE SYNDICATE CO.,LTD.

ที่อยู่ บริษัท 36/8 หมู่ที่3 ซอยฉิมพลี21 ถนนบรมราชชนนี แขวงฉิมพลี เขตตลิ่งชัน
กรุงเทพฯ 10170

Tel : 0-2880-4501-4 , 0-2880-4611 , 0-2880-4865 Fax : 0-2884-1968

E-mail : snnvalve@truemail.co.th www.advance-thai.com